

## PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

FORSSÉN & SALOMAA OY  
Eerikinkatu 2  
FIN-00100 Helsinki  
FINLANDE

Date of mailing (day/month/year) 29 January 2002 (29.01.02)	<b>IMPORTANT NOTIFICATION</b>  International filing date (day/month/year) 25 August 2000 (25.08.00)
Applicant's or agent's file reference HL/FI991823+	
International application No. PCT/FI00/00726	

## 1. The following indications appeared on record concerning:

☐ the applicant    ☐ the inventor    ☒ the agent    ☐ the common representative

Name and Address FORSSÉN & SALOMAA OY Yrjönkatu 30 FIN-00100 Helsinki Finland	State of Nationality	State of Residence
	Telephone No. +358 9 615 3500	
	Facsimile No. +358 9 615 35111	
	Teleprinter No.	

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person    ☐ the name    ☒ the address    ☐ the nationality    ☐ the residence

Name and Address FORSSÉN & SALOMAA OY Eerikinkatu 2 FIN-00100 Helsinki Finland	State of Nationality	State of Residence
	Telephone No. +358 9 615 3500	
	Facsimile No. +358 9 615 35111	
	Teleprinter No.	

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

<input checked="" type="checkbox"/> the receiving Office	<input type="checkbox"/> the designated Offices concerned
<input type="checkbox"/> the International Searching Authority	<input checked="" type="checkbox"/> the elected Offices concerned
<input type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No.: (41-22) 740.14.35	Authorized officer  Gabriele BAEHR  Telephone No.: (41-22) 338.83.38
---	--

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE  
 in its capacity as elected Office

Date of mailing (day/month/year) 14 May 2001 (14.05.01)	
International application No. PCT/FI00/00726	Applicant's or agent's file reference HL/FI991823+
International filing date (day/month/year) 25 August 2000 (25.08.00)	Priority date (day/month/year) 27 August 1999 (27.08.99)
Applicant HOLOPAINEN, Kari et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
 19 March 2001 (19.03.01)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was  
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Charlotte ENGER Telephone No.: (41-22) 338.83.38
---	---

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number  
**WO 01/16424 A1**

(51) International Patent Classification<sup>7</sup>: **D21G 1/00, 1/02**

(21) International Application Number: **PCT/FI00/00726**

(22) International Filing Date: **25 August 2000 (25.08.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
19991823 27 August 1999 (27.08.1999) **FI**  
20000399 21 February 2000 (21.02.2000) **FI**

(71) Applicant (for all designated States except US): **VALMET CORPORATION [FI/FI]**; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOLOPAINEN, Kari [FI/FI]**; Haapalahdentie 4, FIN-40950 Muurame


(FI). **KYYTSÖNEN, Markku [FI/FI]**; Jokivarrentie 141, FIN-04660 Numminen (FI). **PULLINEN, Hannu [FI/FI]**; Kuuselanatie 27, FIN-11130 Riihimäki (FI). **MANNIO, Aaron [FI/FI]**; Ylämaankatu 5, FIN-04430 Järvenpää (FI). **KIRVESMÄKI, Markku [FI/FI]**; Järvipuistonkatu 4 A 3, FIN-04400 Järvenpää (FI).

(74) Agent: **FORSSÉN & SALOMAA OY**; Yrjönkatu 30, FIN-00100 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

[Continued on next page]

(54) Title: **SHOE ROLL**

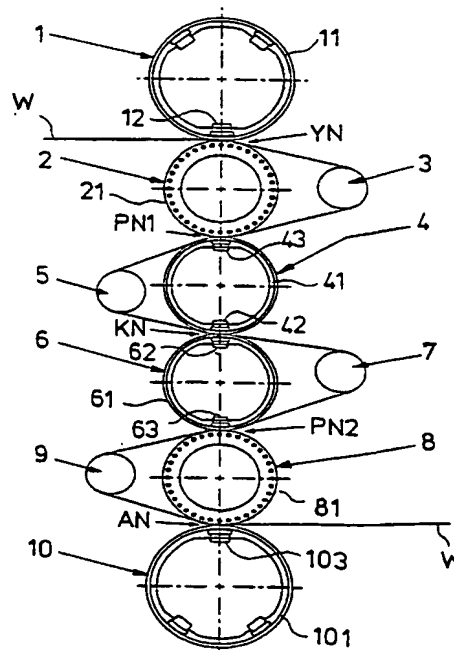

(57) Abstract: The present invention relates to calendaring of a fibrous web. More specifically, the invention relates to a shoe roll for a calender, advantageously a multi-roll calender, a supercalender, a soft calender or equivalent, which calender comprises at least one nip (YN, PN1, KN, PN2, AN) profiling the fibrous web (W) which is being calendared. According to the invention, the shoe roll (1, 4, 6, 10) constitutes at least one of the calender rolls which define the nip, a shell (11, 41, 61, 101) of the shoe roll is of a composite material, and the shoe roll is provided with internal shell-loading shoes (12, 42, 43, 62, 63, 103) for profiling the shell, the nip and/or the fibrous web.

WO 01/16424 A1



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— With international search report.

— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## Shoe roll

5 The present invention relates to calendering of a fibrous web, such as a paper and board web. More specifically, the present invention relates to a shoe roll for a multi-roll calender according to the preamble of claim 1.

10 Calendering is a method by means of which the properties, in particular the thickness profile, smoothness, gloss, surface porosity and translucence of a web-like material, such as a paper web, are sought to be generally improved. In calendering the paper web is passed into a nip which is formed between rolls pressed against each other and in which the paper web is deformed by the action of temperature, moisture and nip pressure, in which connection the physical properties of the paper web can be affected by controlling  
15 the above-mentioned parameters and the time of action. The good physical properties attained by calendering lead to better print quality, thereby bringing a competitive advantage to the manufacturer of paper.

20 Shoe and/or extended-nip calendering is calendering in a calender unit in which a nip is formed between a roll provided with a resilient shell, the shell of said roll being made, for example, of polyurethane, and a press roll or shoe roll which has a rigid shell and is provided with an internal loading shoe and which is made of metal, such as steel.

25 In a multi-roll calender, the paper web is calendered by passing the web through nips defined between calender rolls arranged one upon the other to form a stack of rolls. The rolls are mounted on the frame of the calender and they are arranged to be in nip contact with one another such that the paper web can be calendered by passing it through the nips and by arranging a given load between the rolls in order to provide a linear load in the nip. For example, Finnish patent 95062, which corresponds to US patent 5,590,593, discloses  
30 a calender in which the two lowest rolls in a stack formed by four rolls are deflection-compensated rolls, advantageously zone-controlled rolls and they are mounted so as to be stationary, i.e. their bearing housings are rigidly suspended from supports mounted on the

frame of the calender. The two topmost rolls, of which the highest one is also a deflection-compensated roll, preferably a zone-controlled roll, are mounted to be movable such that their bearing housings are attached to loading arms pivotally mounted by means of articulated joints on the frame of the calender. The highest deflection-compensated roll can be provided with a resilient coating and the second topmost roll is a heatable so-called thermo roll. The lowest deflection-compensated roll in the roll stack can also be provided with a resilient coating. The calender has alternative modes of operation, such as, for example, passing the paper web to be calendered through all three nips with the nips closed or, by opening the topmost nips, through only two or one nip, respectively. It is mentioned that the advantages include, among other things, the fact that the calender principally provides all the same advantages as are achieved by conventional soft calenders, in addition to which the middle nip in the calender is a hard nip, by means of which caliper can be equalized. Moreover, the modifiability of the calender makes it suitable for many paper grades.

Similar modifiable calenders are also disclosed in European application publication 890676 and in GB application publication 2,119,422. European application publication 890676 discloses a calender in which six rolls are attached to a frame to form a calender stack. The topmost roll is fixedly attached to the frame, the middle rolls are attached to loading arms, and the bottom roll is arranged in a carriage which can be displaced in a vertical direction in a guide. The topmost and lowermost rolls are deflection-compensated rolls, and the topmost and lowermost rolls as well as the two middle rolls are rolls provided with an elastic coating, while the second lowest roll and the second topmost roll are hard-surface rolls. It is typical of the calender that when the topmost and lowermost nips are closed, the other nips therebetween are open, so that the web can be calendered symmetrically by means of the topmost and the lowermost nip and conducted without calendering through the open nips and via the take-out rolls situated adjacent to the rolls which form the opened nips.

GB application publication 2,119,422 in turn relates to an arrangement in which two stacks of three rolls are placed adjacent to each other on the same calender frame, the

middle roll in each of said stacks being a hard roll and fixedly mounted on the frame and the soft rolls situated on both sides of the middle roll being displaceable to an operating position into nip contact with the hard-surface roll and away from it. These rolls situated in both stacks above and beneath the hard roll are deflection-controlled rolls. One of the soft-surface rolls in each roll stack serves only as a spare roll, which can be employed when the soft-surface roll proper which is in nip contact, for instance, becomes damaged, and thus the calender operates in practice as a double nip calender formed by two roll pairs.

Figs. 5D and 5E of US patent 4,332,191 show a calender which comprises two stacks of three rolls placed one upon the other, in which the middle roll in the upper stack is a soft roll and all rolls in the lower stack are hard rolls. Moreover, the calender includes a stack of three rolls on the other side of the frame, the middle roll in the stack being soft. The web can be calendered by passing it via the stacks provided with a soft middle roll or, by lowering the bottom roll of the upper stack into contact with the lower stack, a stack of four hard rolls is provided, and the web is passed through three nips of said stack.

There is also known a soft calender under the name of OPTIGLOSS™, which comprises two separate sets of three rolls, in both of which the middle roll is a hard thermo roll and there is a soft-surface roll on both sides of it. This provides a calender having 6 rolls and 4 nips in all.

As described above, it is typical of all calender structures that nips are opened by means of loading arms or by displacing other support structures supporting the calender roll, such as a carriage supporting the roll in guides extending parallel to the roll stack. This is necessary in order that the nips may be opened when changing the mode of calendering, i.e. the number or location of the nips which are calendering, for example, when the paper grade to be produced is changed. Likewise, it is typical of previous arrangements, like EP890676, that the mode of calendering is changed by opening some of the nips and by passing the web through the remaining closed nips. This leads to the fact that many rolls have to be moved.

Shoe rolls are typically hydraulically deflection-compensated, zone-controlled rolls in which the shell is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement, such as a row of loading shoes, which transfer the nip force acting on the shell rotating around the central shaft so as to be carried by the central shaft. The loading element is generally also divided into zones, in which connection the loading pressure can be regulated as required by profiling. The zoning in this kind of zone-controlled shoe roll may comprise individual elements of the loading arrangement, in which connection the number of zones in the roll and in the loading arrangement may exceed 60 - as examples may be mentioned the shoe rolls marketed by the applicant under the trademarks **SymCD™** and **SymCDS™**, or the zoning may comprise a group of individual elements of the loading arrangement, in which connection the roll and the loading arrangement normally comprise eight zones - as examples may be mentioned the shoe rolls marketed by the applicant under the trademarks **SymZ™**, **SymZS™**, **SymZL™**, and **SymZLC™**.

Shoe and/or extended-nip calendering has generally been found to be good for producing low-gloss paper grades, i.e. having a Hunter gloss % below 40, by calendering. When higher gloss is required, the nip pressure is, however, not sufficient to provide gloss. With ever-increasing running speeds, calendering is becoming a bottleneck in the papermaking process, and satisfactory quality is not achieved by today's machine calender units. Some of the drawbacks of the present papermaking process are also that

- the loss of bulk increases when gloss is improved, and
- in order to provide sufficient quality, it is necessary to use webs with an abundance of coating and/or to use off-line calendering, in particular multi-nip calendering, the known application of which is supercalendering, and/or soft calendering.

The direction in the calendering technology is to an ever increasing degree towards on-line solutions even when the intention is to manufacture higher quality printing paper grades, such as SC and glossy coated papers. Fig. 1 illustrates how different printing paper grades are calendered today and, in particular, it can be seen where the calendering technology is heading in the near future.



a. **Machine calendering** is calendering in a calender unit in which nips are formed between non-resilient smooth-surface metal rolls placed one upon the other. The width of the nip in a machine calender is typically very small and the nip load in the nips is relatively high.

5 b. **Multi-roll calendering**, the known applications of which include supercalendering and, for producing SC-A and LWC grades in particular, a multi-roll on-line or off-line calender which provides in off-line operation in practice the best result in terms of quality, is calendering in a calender unit in which nips are formed between a smooth-surface metal or cast iron roll and a roll coated with a resilient coating, such as a  
10 paper or polymer roll, in which connection a wide nip is formed. The resilient-surface roll conforms to the contours of the surface of paper and presses the opposite side of paper evenly against the smooth-surface metal roll. Because of the resilient-surface roll, the calendering time is also longer, wherefore in order to assure adequate capacity, the paper machine must be equipped today even with three multi-roll  
15 calenders. In a multi-roll calender there are today typically from one to two sets of rolls and 10 to 12 nips. For the purpose of treating both sides of the web, the supercalender comprises a so-called reversing nip in which there are two resilient-surface rolls placed against each other. The linear load in the multi-roll calender increases from the top nip to the bottom nip because of the gravity of the earth. By using relief of the  
20 rolls, this increase in load can be compensated for. This kind of multi-roll calender provided with the relieving of the rolls is the multi-roll calender marketed by the applicant under the trademark **OptiLoad™**.

25 c. **Soft calendering** is calendering in a calender unit in which nips are formed in a manner similar to that of a multi-roll or supercalender between a smooth-surface metal roll and a roll covered with a resilient coating, in which connection a wide nip is formed. In a soft calender, each nip is formed between separate roll pairs, in which connection the nip load in individual nips can be adjusted in each individual nip, or between roll pairs in separate sets of rolls, in which connection the nip load can be adjusted in each individual set of rolls. The soft calender can be used as an on-line  
30 calender and it can replace the machine calenders of a paper machine. In order to treat both sides of the web in the calender, the order of the roll pairs or of the sets of rolls

forming the successive nips is reverse with respect to the web such that the resilient-surface roll or the resilient-surface rolls can be caused to work on both surfaces of the web.

5 One object of the present invention is to eliminate or at least minimize the weaknesses and drawbacks associated with today's multi-roll calendering and to provide a new type of intermediate and/or middle roll for a multi-roll calender in order to improve the profileability of a fibrous web in the nips of a multi-roll calender, such as a multi-nip on-line or off-line calender, supercalender and/or soft calender. Another object of the present  
10 invention is to provide a calender that can be modified in a new, simple manner.

These objectives are achieved according to the invention by means of a shoe roll of the kind mentioned at the beginning, the principal special features of the shoe roll being set forth in the characterizing part of the accompanying independent claim 1.

15

In the shoe roll according to the invention, the shoe rows loading and profiling the shell of the shoe roll are arranged in the direction of the nips of the shoe roll, and the shell of the shoe roll is made of a composite material, the properties of which are selected with a fibre orientation such that the shell is more rigid in the circumferential direction than in  
20 the axial direction.

20

The calender according to one embodiment of the invention comprises two stacks of three rolls placed one upon the other, the rolls of the stacks being displaceable so as to provide one operation nip between the middle rolls or two operation nips in both stacks.

25

Both of the stacks of three rolls placed one upon the other in the same calender frame of the calender have advantageously a thermo roll in the middle and a soft-surface roll above and underneath. The soft-surface rolls are advantageously rolls provided with a movable shell, which means that they can be displaced in the direction of the nip plane by displac-  
30 ing the shells in the radial direction. The movable-shell rolls are fixedly attached to the frame of the calender. In that connection, the lower movable-shell roll in the upper roll

30

stack and the upper movable-shell roll in the lower roll stack can be moved by displacing the shells into nip contact with each other and apart from nip contact with the middle roll of the upper roll stack and the middle roll of the lower roll stack, respectively. Likewise, the top roll in the upper roll stack and the bottom roll in the lower roll stack can be displaced by means of a movement of the roll shell taking place in the direction of the nip plane apart from the middle roll and back into nip contact with the middle roll. The rolls are fixedly attached to the frame at such distances from one another that all the nips can be opened by means of movements of the movable-shell rolls.

With respect to the advantages of the shoe roll according to the invention it may be mentioned that the loading of the nip can be simultaneously changed by means of individual shoes or a group of shoes of the shoe rows which are loading the shell of the shoe roll and which are spaced from one another in the circumferential direction, i.e. the load of the nip can be increased and/or reduced, thereby providing successive nips which profile in the same way and enhance the result of calendering. The invention also makes it possible that all the nips of a multi-roll calender can now be made profiling nips by means of the shoe roll and that the top and/or the bottom roll of a multi-roll calender, such as a supercalender, can now be made a profiling top and/or bottom roll.

In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is advantageously selected from a group which includes: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over  $45^\circ$  with respect to the axis of the roll. Advantageously, this winding angle is in the range of  $70^\circ$  -  $90^\circ$ .

The invention enables the calender to be modified only by arranging the middle rolls (the top roll in the lower roll stack and the bottom roll in the upper roll stack) into nip contact

with each other and apart from each other into nip contact with the middle roll of their own stack. This allows, for example, symmetric calendering to be accomplished in four nips formed by hard-surface and soft-surface rolls while the nip formed between the top calender roll of the lower stack and the bottom roll of the upper stack is open, or matte calendering to be accomplished by passing the web out of the calender through the closed nip between the bottom roll of the upper stack and the top roll of the lower stack. By dimensioning the positioning of the roll shafts, the diameters of the roll shells and the distances of the radial movement of the roll shells in a suitable manner, the change can be accomplished only by displacing roll shells, i.e. separate transfer devices for displacement of the entire roll are not needed.

With respect to the advantages of other details and the structural details of the invention, reference is made to the dependent claims of the accompanying set of claims.

In the following, the invention will be described in more detail with reference to the accompanying patent drawings, in which

Figure 1 shows how different printing paper grades are calendered today and, in particular, the direction in which the calendering technology is heading in the near future,

Figure 2 is a schematic sectional view of a multi-roll calender,

Figure 3 is a side view of a calender with nips open,

Figure 4 shows a calender in a first running situation, and

Figure 5 shows the calender in a second running situation.

In the multi-roll calender shown in Fig. 2, the run of a fibrous web which is being calendered is as follows. The fibrous web W which is calendered enters a top nip YN between a top roll 1 of the multi-roll calender and an upper rigid-shell press roll 2 provided with a smooth-surface metal or chilled shell 21, from which nip the fibrous web W runs around a guide member 3 (e.g. a guide roll) into an upper profiling nip PN1 between the rigid-shell press roll 2 and an upper intermediate or middle roll 4 according to the invention, which roll is a shoe roll provided with a shell 41 of a composite material, after which the fibrous web W runs around a guide member 5 (e.g. a guide roll) into a

reversing nip KN between the upper middle roll 4 according to the invention, which roll is a shoe roll, and a lower intermediate or middle roll 6 according to the invention, which roll is a shoe roll and also has a shell 61 of a composite material, after which the fibrous web W runs around a guide member 7 (e.g. a guide roll) into a lower profiling nip PN2 between a lower middle roll 6 according to the invention, which roll is a shoe roll, and a lower rigid-shell press roll 8 provided with a smooth-surface metal or chilled shell 81, after which the fibrous web W runs around a guide member 9 (e.g. a guide roll) into a bottom nip AN between the lower rigid-shell press roll 8 and a bottom roll 10 of the calender.

The upper middle roll 4 according to the invention comprises, according to the invention, a composite shell 41 and an upper shoe row 43 and a lower shoe row 42 which are arranged both at the profiling nip PN1 and at the reversing nip KN and which load and profile the upper profiling nip PN1 of the fibrous web, the reversing nip KN of the fibrous web and the composite shell 41. The lower middle roll 6 is substantially identical with the upper middle roll 4. Thus, the lower middle roll 6 comprises, according to the invention, a composite shell 61 and an upper shoe row 62 and a lower shoe row 63 which are arranged both at the reversing nip KN and at the profiling nip PN2 and which load and profile the reversing nip KN of the fibrous web, the lower profiling nip PN2 and the composite shell 61.

In order to provide successive profiling nips, which profile in the same way and enhance the result of calendering, the reversing nip KN in the multi-roll calender is preceded by at least one profiling nip PN1 (as shown in Fig. 2) in which the metal or chilled shell 21 of the upper rigid-shell press roll 2 and the composite shell 41 of the upper middle roll 4 according to the invention are placed against each other. In addition, for the purpose of enhancing the result of calendering, the reversing nip KN is followed by at least one profiling nip PN2 (as shown in Fig. 2) in which the composite shell 61 of the lower middle roll 6 according to the invention and the metal or chilled shell 81 of the lower rigid-shell press roll 8 are placed against each other.

In accordance with the invention, the properties of the composite material are selected with a fibre orientation such that the composite shell 41, 61 is considerably more rigid in the circumferential direction than in the axial direction, with the result that by changing the load of the shoe rows 42, 43, 62, 63, the profiles of the composite shell 41, 61, the profiling nip NP1, NP2 and/or the reversing nip KN can be changed. In that connection it becomes possible, among other things, to control the nip spacing and thus the linear load in the profiling nip PN1, PN2 and/or in the reversing nip KN and to correct any profile errors caused by different deflections of the rolls defining the nip by changing the profile of a roll shell or roll shells.

In order to make all the nips of the calender such that they can be profiled and that they profile the fibrous web W, in the embodiment shown in Fig. 2, in addition to the middle rolls 4 and 6, shells 11 and 101 of the top roll 1 and the bottom roll of the calender, respectively, have also been made of a composite material, which is advantageously the same composite material as the composite material of the shells of the middle rolls 4, 6. Since the top and bottom rolls 1, 10 have also been provided with an internal shoe row 12, 103 loading the shell, the profiles of the composite shell 11, 101, the top nip YN and/or the bottom nip AN can be changed by changing the load of the shoe rows 12, 103. In that connection it becomes possible, among other things, to control the spacing of the nip YN, PN1, KN, PN2, AN and to correct any profile error caused by different deflection of the upper and lower rolls defining the nip by changing the profile of the roll shell.

In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is selected from a group advantageously including: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll 1, 4, 6, 10. Advantageously, this winding angle is in the range of 70° - 90°.

The shoe roll 1, 4, 6, 10 according to the invention is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell 11, 41, 61, 101 of which roll is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement 12;42;43; 62;63;103, such as a row of loading shoes which transfer the nip force acting on the composite shell rotating around the central shaft so as to be carried by the central shaft.

Fig. 3 is a side view of a calender. Six rolls are placed one upon the other on a frame R of the calender, said rolls forming two stacks A and B of three rolls. In the upper roll stack A, the top and bottom rolls 1 and 4 are rolls provided with a movable shell, the shells of said rolls being displaceable in the radial direction in the direction of the nip plane passing through the axes of rotation of the rolls. The roll shells of said rolls 1 and 4 are soft-surface shells, for example, provided with a polymer coating. Between the top and bottom rolls 1, 4 there is a hard heatable roll 2, i.e. a so-called thermo roll. The surface of this middle roll 2 can be, for example, a smooth metal surface.

In the lower roll stack B, in which the nip plane of the rolls is a continuation of the nip plane of the upper roll stack A, there are rolls which are identical with and in the same order as the rolls in the upper roll stack A, i.e. a middle hard heatable thermo roll 8 and, above and beneath it, a soft-surface movable-shell roll 6 and 10, respectively.

The movable-shell rolls 1, 4, 6, and 10 are so-called Sym-rolls, inside which there are loading members applying a force in a radial direction, which members are located on a stationary shaft and distributed in different zones across the machine width and by means of which the roll shell can be displaced in a radial direction and, in particular, in the direction of the nip plane in order to open and close the nip formed by the roll and to load the roll in a controlled manner.

The movable-shell soft rolls 1, 4, 6, and 10 in both roll stacks A, B have all identical measures and structure, and the middle rolls 3 and 8 in both roll stacks A, B have identical

measures and structure, with the result that only two types of rolls need be arranged as spare parts for the calender.

5 The movable-shell rolls 1, 4, 6, and 10 are attached to the roll frame R by means of supports 13 which have substantially fixed positions and which support the stationary shaft of the roll at both ends. Even though Fig. 3 shows a horizontal bolt 14 for attaching the supports 13 to the calender frame R, other means of attachment can also be used by which the supports can be arranged to be in a fixed position on the frame. The bearing housings of the middle rolls 4 and 6 of the roll stacks A, B can be attached to the frame R by means of articulation supports and said rolls can be relieved hydraulically according to the known principles concerning sets of articulation rolls at both ends by means of a hydraulic cylinder acting between the bearing housing and the frame.

10 The rolls are placed in two superimposed stacks A, B such that the movable-shell rolls 1, 4, 6, and 10 can be displaced apart from the middle hard rolls 2 and 8, and the bottom roll 4 of the upper roll stack and the top roll 6 of the lower roll stack are not in contact with each other, in which connection all the nips YN, PN1, KN, PN2, AN from top to bottom are open. Fig. 3 shows this situation. The distance d between the roll shells in the nips can be a few millimetres, for example, below 10 mm.

20 Fig. 4 shows a first running situation in which both nips YN, PN1 and PN2, AN of each roll stack A, B are closed, i.e. a calendering nip is formed on both sides of the heated thermo roll 2, 8 with the respective soft-surface roll 1, 4, 6, and 10. In other words, the web which is being calendered is run through four nips in total, which are all nips formed by a soft-surface roll and a hard heated roll. Between the roll stacks, the web runs through the open nip KN. The web will also be calendered symmetrically, i.e. in the first roll stack, the first surface is against a hard hot-surface roll and, in the next stack, the opposite surface is against a hard hot-surface roll. By regulating load and/or temperature, the different sides can also be treated differently in the successive roll stacks A, B.



Fig. 5 shows a second running situation in which the bottom roll 4 in the upper roll stack A and the top roll 6 in the lower roll stack B have been moved apart from the middle roll 2 and 8 of the respective roll stack, i.e. they have been moved into contact with each other in the direction of the nip plane in order to close the space left between the roll stacks, whereby the calendering nip KN is formed which is defined by a soft-surface roll on both sides. In this mode of running, the web to calendered is passed only through this nip KN in order to implement matte calendering. In this running mode, the rolls 4 and 6, Sym-rolls, are turned through 180° such that the loading members are placed at the calendering nip KN. If either roll or both rolls is/are provided with two series of loading members located inside the roll shell at a distance of 180° from each other, the roll need not be turned.

The nip KN can also be formed such that the bottom roll 10 of the lower stack B and the middle roll 8 attached to the frame by means of articulation supports are lowered, with the result that the nip PN2 becomes free, and the bottom roll 4 of the upper stack A is lowered to form the nip KN.

No separate loading cylinders are needed in the calender because loading can be accomplished by means of the loading members located inside the shells of the Sym-rolls (soft-surface rolls 1, 4, 6, 10).

Figs. 3-5 also show take-out rolls 3, 5, 7, 9 typical of the calender, by means of which the web W which is being calendered can be taken out of the nips and which have been placed on both sides of the roll stacks A,B.

On-line calendering of paper is advantageously accomplished by means of the calender described above, in which connection it can be placed in a papermaking line. The calender is short in the machine direction, with the result that it is easy to place in an existing line, for example, in connection with rebuilds. Moreover, a change of the mode of running from the mode of calendering shown in Fig. 4 to the mode of calendering shown in Fig. 5 and vice versa is easy to accomplish.

Above, the invention has been described only by way of example by means of one of its embodiments regarded as advantageous. This is, of course, not intended to limit the invention and, as is clear to a person skilled in the art, many different alternative solutions and modifications are feasible within the inventive idea and its scope of protection defined in the accompanying claims. The wide usability of the present invention in almost all kinds of calendering applications, with the exception of pure machine calendering, shall be particularly noted.

The shoe roll provided with a composite shell according to the invention enables the calender to be run and used with different nip combinations. Some of the nips can be kept open. For example, in the case shown in Fig. 2, the nips AN and PN2 can be left open, in which connection the web W is passed directly from the knip KN to reeling. In that connection, the calender shown in Fig. 2 can be arranged to comprise two nips by feeding pressure only for the shoe 43 in the roll 4 and leaving the shoe 42 without pressure. Thereby, a calender is provided which has two successive nips profiling the web W on the same side. When the shoes 12 and 43 above and beneath the nips YN and PN1 are simultaneously pressed or relieved, two successive nips can be provided which profile the web W in the same way, which enhances the outcome.

## Claims

1. A shoe roll for a calender, advantageously for a multi-roll on-line or off-line calender, soft calender or equivalent, which calender comprises at least one nip (YN, PN1, KN, PN2, AN) profiling a fibrous web (W) that is being calendered, **characterized** in that the shoe roll (1, 4, 6, 10) constitutes at least one of the calender rolls which define the nip (YN, PN1, KN, PN2, AN), that a shell (11, 41, 61, 101) of the shoe roll (1, 4, 6, 10) is of a composite material, and that the shoe roll (1, 4, 6, 10) is provided with internal shell-loading means (12, 42, 43, 62, 63, 103), advantageously loading shoes, for profiling the shell (11, 41, 61, 101), the nip (YN, PN1, KN, PN2, AN) and/or the fibrous web (W) as well as for controlling contact in the nip (YN, PN1, KN, PN2, AN).
2. A shoe roll according to claim 1, **characterized** in that the shoe roll is a middle or intermediate roll (4, 6) in a multi-roll calender, a soft calender or equivalent, and that shoe rows (42, 43; 62, 63) loading and profiling the composite shell (41, 61) of the shoe roll are arranged parallel to the nips (PN1, KN, PN2) defined against the shoe roll.
3. A shoe roll according to claim 1, **characterized** in that both middle or intermediate rolls (4, 6) in a multi-roll calender are composed of the shoe roll, and that shoe rows (42, 43; 62, 63) loading and profiling the composite shell (41, 61) of the shoe roll are arranged parallel to the nips (PN1, KN, PN2) defined against the shoe roll.
4. A shoe roll according to claim 2 or 3, **characterized** in that the shoe rows (42, 43; 62, 63) are uniformly spaced with respect to one another in the circumferential direction of the composite shell (41, 61).
5. A shoe roll according to any one of claims 1 to 3, **characterized** in that the shoe roll is a top roll (1) in a multi-roll or soft calender, and that shoe rows (12) loading and profiling the composite shell (11) of the shoe roll are arranged parallel to a top nip (YN) defined against the shoe roll.

6. A shoe roll according to any one of claims 1 to 3, **characterized** in that the shoe roll is a bottom roll (10) in a multi-roll or soft calender, and that the shoe rows (103) loading and profiling the composite shell (101) of the shoe roll are arranged parallel to a bottom nip (AN) defined against the shoe roll.

5

7. A shoe roll according to any one of claims 1 to 6, **characterized** in that the properties of the composite shell of the shoe roll are achieved by a fibre orientation such that the composite shell is more rigid in the circumferential direction than in the axial direction.

10

8. A shoe roll according to claim 7, **characterized** in that the composite material is selected from a group which advantageously includes: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

15

9. A shoe roll according to claim 7, **characterized** in that in order to provide a shell which is more rigid in the circumferential direction in relation to the axial direction of the shoe roll (1, 4, 6, 10), the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll (1, 4, 6, 10).

20

10. A shoe roll according to claim 9, **characterized** in that the angle is advantageously in the range of 70° - 90°.

25

11. A shoe roll according to any one of claims 1 to 10, **characterized** in that the shoe roll (1, 4, 6, 10) is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell (11, 41, 61, 101) of which is supported from a non-rotating central shaft of the roll by means of hydrostatic loading arrangements (12; 42, 43; 62, 63; 103), such as rows of loading shoes, which transfer the nip force directed at the composite shell rotating around the central shaft so as to be carried by the central shaft.

30

12. A shoe roll according to any one of the preceding claims 1 to 11, **characterized** in that, in calender operation, the shoe roll (6, 10) can be separated from nip (PN2, KN) forming contact with a press roll (8) or another shoe roll (4).

5 13. A shoe roll according to any one of the preceding claims 1 to 12 in a calender in which there are two stacks (A,B) of three rolls placed one upon the other such that between the stacks there remains a space which is defined by a bottom roll (4) of the upper stack (A) and by a top roll (6) of the lower stack (B), **characterized** in that said two rolls (4, 6) can  
10 be separated from contact with rolls (2, 8) of their own roll stack (A, B) into nip contact (KN) with each other.

14. A shoe roll according to claim 13, **characterized** in that said two rolls (4, 6) that can be separated from contact are soft-surface rolls.

15 15. A shoe roll according to claim 14, **characterized** in that the top roll (1) of the upper roll stack (A) and the bottom roll (10) of the lower roll stack (B) are also soft-surface rolls and the middle rolls (2, 8) of the roll stacks (A, B) are hard rolls.

20 16. A shoe roll according to claim 15, **characterized** in that the middle rolls (2, 8) are heatable thermo rolls.

25 17. A shoe roll according to any one of the preceding claims 13 to 16, **characterized** in that at least the bottom roll (4) of the upper roll stack (A) and the top roll (6) of the lower roll stack (B) are fixedly mounted on a calender frame (R) such that their shells can be displaced in the direction of the roll stack with respect to supports (13) of the rolls.

30 18. A calender according to claim 17, **characterized** in that at least the bottom roll (4) of the upper roll stack (A) and the top roll (6) of the lower roll stack (B) are provided with loading members located inside the roll shell.

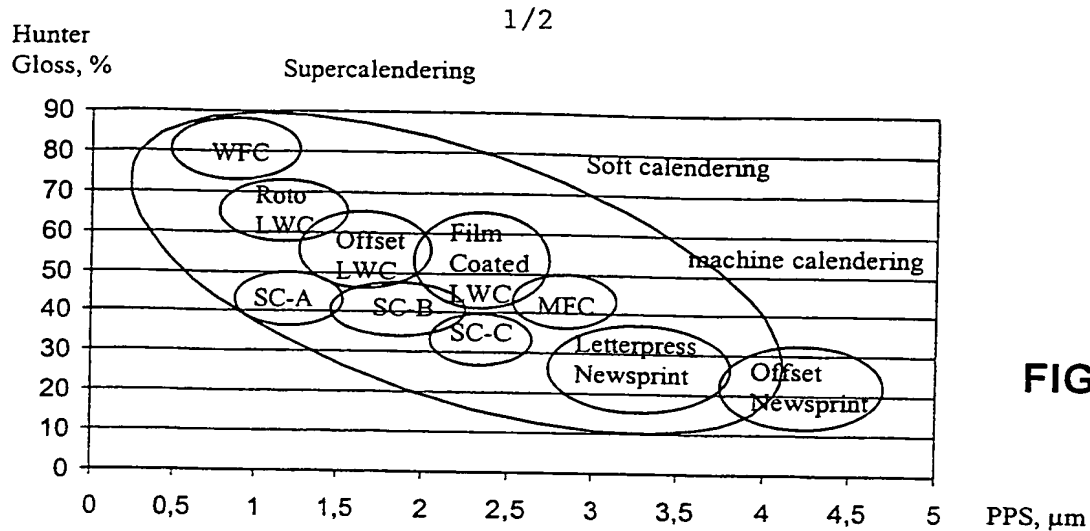


FIG. 1.

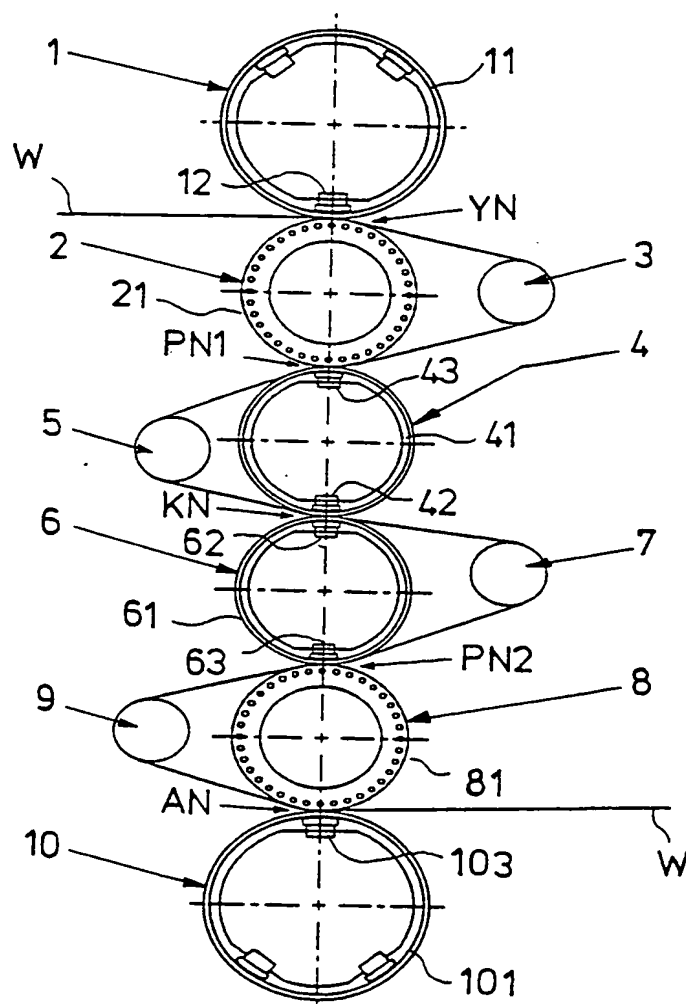


FIG. 2

2/2

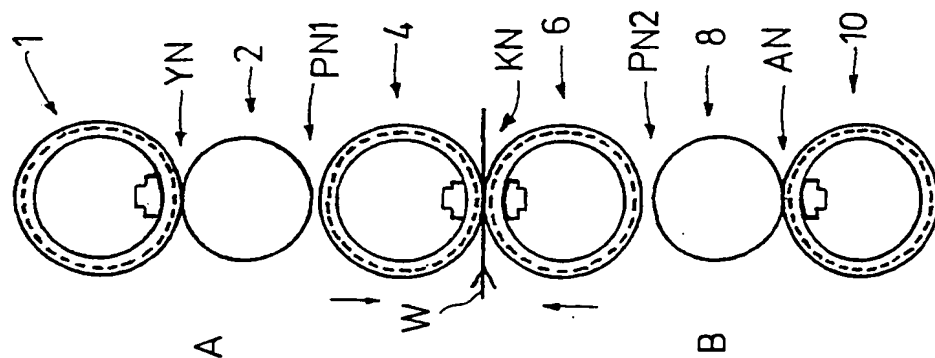


FIG. 5

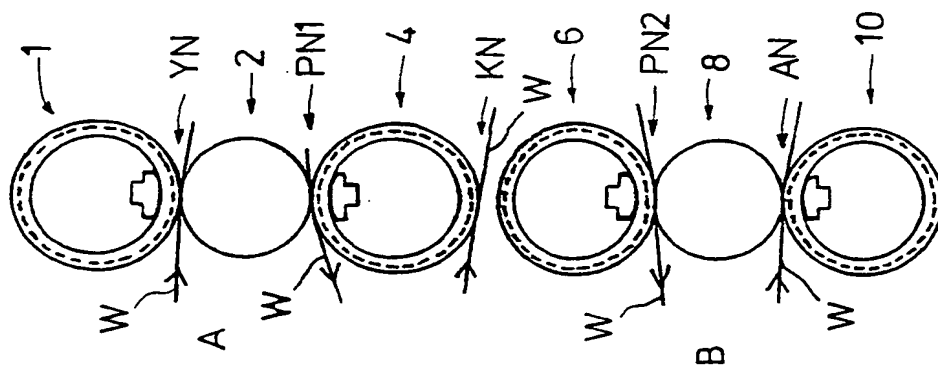


FIG. 4

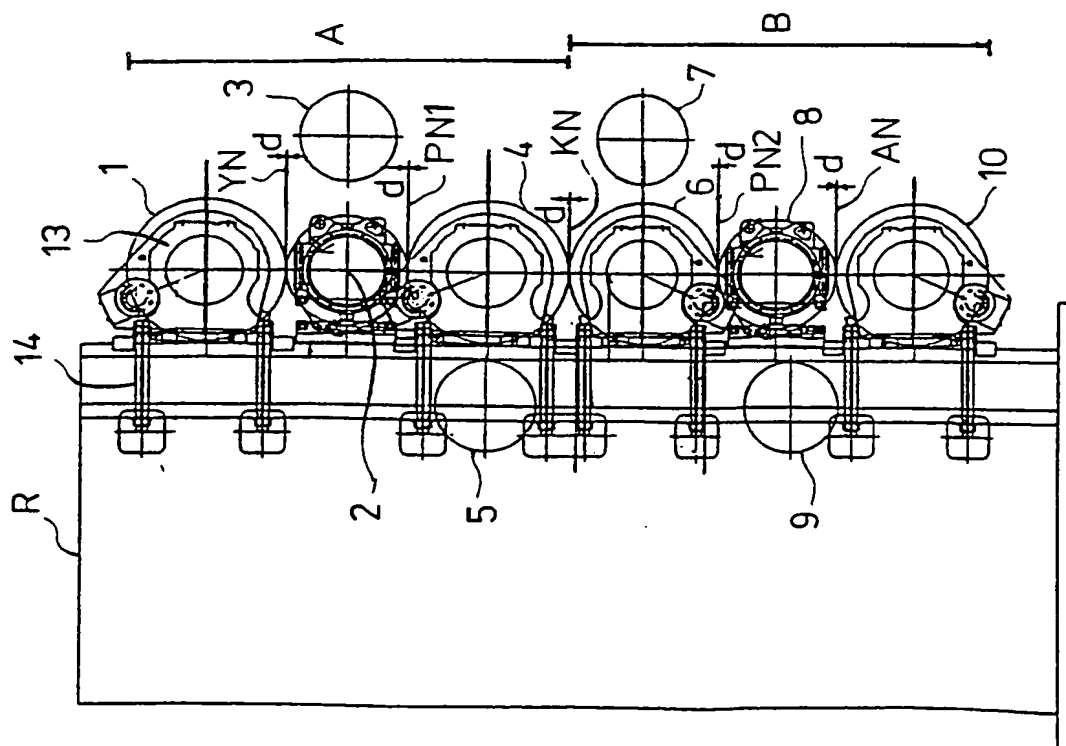


FIG. 3

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00726

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21G 1/00, D21G 1/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5938895 A (KIMMO ILARI HIRVONEN), 17 August 1999 (17.08.99)	1-4,7,11
Y	--	5,6,8-10,12
Y	US 5590593 A (VILLE KORHONEN ET AL), 7 January 1997 (07.01.97)	5,6,12
A	--	1-4,7-11, 13-18
Y	EP 363887 A2 (MITSUBISHI RAYON CO., LTD.), 18 April 1990 (18.04.90)	8-10
A	--	1

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 December 2000

Date of mailing of the international search report

14. 02. 01

Name and mailing address of the International Searching Authority  
European Patent Office P.B. 5818 Patentlaan 2  
NL-2280 HV Rijswijk  
Tel(+31-70)340-2040, Tx 31 651 epo nl,  
Fax(+31-70)340-3016

Authorized officer

JAN CARLERUD/ELY

Telephone No.



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00726

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,Y	WO 9963154 A1 (VALMET CORPORATION), 9 December 1999 (09.12.99), page 1, line 14 - line 19  --	8-10
A	EP 890676 A1 (VOITH SULZER FINISHING GMBH), 13 January 1999 (13.01.99)  -- -----	1-18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/FI 00/00726

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5938895	A	17/08/99	NONE		
US	5590593	A	07/01/97	AT	177803 T	15/04/99
				CA	2139148 A	30/06/95
				DE	69417197 D,T	18/11/99
				EP	0661405 A,B	05/07/95
				FI	95062 B,C	31/08/95
				FI	935912 A	30/06/95
EP	363887	A2	18/04/90	NONE		
WO	9963154	A1	09/12/99	AU	4268499 A	20/12/99
				FI	103740 B	00/00/00
				FI	981240 A	31/08/99
EP	890676	A1	13/01/99	NONE		

Not entered

PATENT COOPERATION TREATY

PCT

RECEIVED 15 NOV 2001

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference HL/FI991823+	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/FI00/00726	International filing date (day/month/year) 25/08/2000	Priority date (day/month/year) 27/08/1999
International Patent Classification (IPC) or national classification and IPC D21G1/00		
Applicant VALMET CORPORATION et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 6 sheets, including this cover sheet.

- ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 3 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand  19/03/2001	Date of completion of this report  13.11.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer  Maisonnier, C  Telephone No. +49 89 2399 2064 

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/FI00/00726

**I. Basis of the report**

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):  
**Description, pages:**

1-14 as originally filed

**Claims, No.:**

1-13 with telefax of 12/10/2001

**Drawings, sheets:**

1/2,2/2 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).  
☐ the language of publication of the international application (under Rule 48.3(b)).  
☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.  
☐ filed together with the international application in computer readable form.  
☐ furnished subsequently to this Authority in written form.  
☐ furnished subsequently to this Authority in computer readable form.  
☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.  
☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:  
☒ the claims, Nos.: 14-18

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/FI00/00726

☐ the drawings, sheets:

5. ☒ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

**see separate sheet**

6. Additional observations, if necessary:

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

**1. Statement**

Novelty (N)	Yes:	Claims
	No:	Claims 1,3,9
Inventive step (IS)	Yes:	Claims
	No:	Claims 2,4-8,10,11
Industrial applicability (IA)	Yes:	Claims 1-11
	No:	Claims

2. Citations and explanations  
**see separate sheet**

**VII. Certain defects in the international application**

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

**VIII. Certain observations on the international application**

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:  
**see separate sheet**

**Re Item I**

**Basis of the report**

According to amended Claims 12 and 13, the calender comprises two stacks of three rolls placed one upon the other such that between the stacks there remains a space which is defined between the bottom roll of the upper stack and the top roll of the lower stack, in which the intermediate roll of the upper stack and of the lower stack are shoe rolls.

There is no basis in the application as originally filed for the underlined feature above, contrary to the requirements of Article 34(2)(b) PCT.

The present report has therefore been established as if amended Claims 12 and 13 had not been filed.

**Re Item V**

**Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. Reference is made to the following documents:

D1: US-A-5 938 895  
D2: US-A-5 590 593  
D3: EP-A-0 698 684  
D4: EP-A-0 890 676

Document D3 was not cited in the international search report.

2. Insofar as the subject-matter of Claims 1 to 11 can be understood given the objections raised under Item VIII, it does not meet the requirements set forth in Article 33(1) PCT for the following reasons.
3. Document D1 (see column 4, line 16 - column 5, line 58) discloses a multi-roll calender comprising a plurality of calender rolls (21-26) arranged one upon the

other and defining in operation a plurality of nips, wherein at least one nip is a profiling nip for profiling a fibrous web (12) that is being calendered, one of the calender rolls defining the profiling nip being a shoe roll (24) comprising an outer shell (31) and internal shell-loading shoe means (34) for profiling the shell, the nip and the fibrous web as well as for controlling contact in the nip, wherein the shoe roll (24) is an intermediate roll located between the top roll (26) and the bottom roll (21) of said plurality of rolls and comprises two rows of internal shell-loading shoe means (34) arranged parallel to the nips defined against the shoe roll.

According to Document D1 (see column 5, lines 21-23), the outer shell of the shoe roll may be made of steel, steel as an alloy being a composite material.

Thus, the subject-matter of Claim 1 is not novel (Article 33(2) PCT).

4. Document D1 is also novelty-destroying for Claims 3 and 9 (Article 33(2) PCT).
5. Dependent Claims 2, 4 to 8, 10 and 11 do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of inventive step, the essential features thereof being suggested by Documents D1, D2 (see column 2, line 33 - column 5, line 47), D3 (see column 2, lines 20-22; column 2, line 46 - column 3, line 35) and D4 (see column 4, line 14 - column 5, line 42).

#### **Re Item VII**

##### **Certain defects in the international application**

1. The two-part form of Claim 1 is not correct (Rule 6.3(b) PCT).
2. The description is not in conformity with the claims as required by Rule 5.1(a)(iii) PCT.
3. Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in Documents D1 and D3 is not mentioned in the description, nor are these documents identified therein.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/FI00/00726

**Re Item VIII**

**Certain observations on the international application**

1. In Claim 6, it is not clear to which fibre orientation reference is made since the shell material has not been defined as comprising fibres (Article 6 PCT).
2. In Claim 7, it is not clear how a composite material can be made solely of glass fibre. Moreover, it is not clear what is meant by composite of carbon fibres "and/or" epoxy (Article 6 PCT).
3. The subject-matter of Claim 9 is not clear, since according to Claim 1 the calender can comprise only one shoe roll which has to be an intermediate roll of the calender, while according to Claim 9 the shoe roll may be either a top roll, an intermediate roll or a bottom roll (Article 6 PCT).
4. The embodiments of the invention shown in figures 3-5 do not fall within the scope of the amended claims, since none of the intermediate shoe rolls are provided with more than one row of shell-loading shoe means. This inconsistency between the claims and the description leads to doubt concerning the matter for which protection is sought, thereby rendering the claims unclear (Article 6 PCT).



## Claims

1. A calender, preferably a multi-roll calender, with at least one shoe roll, which calender comprises a plurality of calender rolls (1, 2, 4, 6, 8, 10) arranged one upon  
5 the other and defining in operation at least one profiling nip (YN, PN1, KN, PN2, AN) for profiling a fibrous web (W) that is being calendered, at least one of the calender rolls defining the profiling nip being a shoe roll comprising an outer shell (41, 61) and internal shell-loading shoe means (12, 42, 43, 62, 63, 103) for profiling the shell, the nip and the fibrous web as well as for controlling contact in the nip,  
10 **characterised in, that**
  - a shoe roll (2, 4, 6, 8) is at least one of calender rolls between the top and bottom calender rolls (1, 10) of a multi-roll calender,
  - a shell (41, 61) of each shoe roll (2, 4, 6, 8) is of composite material; and
  - rows of internal shell-loading shoe means (42, 43; 62, 63) are arranged parallel  
15 to a nip (PN1, KN, PN2) defined against the shoe roll (2, 4, 6, 8).
2. A calender according to claim 1, **characterized** in that middle or intermediate rolls (4, 6) in a multi-roll calender are composed of the shoe roll.
- 20 3. A calender according to claim 1 or 2, **characterized** in that the rows of internal shell-loading shoe means (42, 43; 62, 63) are uniformly spaced with respect to one another in the circumferential direction of the composite shell (41, 61).
4. A calender according to any one of claims 1 to 3, **characterized** in that the top roll  
25 (1) of the multi-roll calender is composed as a shoe roll.
5. A calender according to any one of claims 1 to 4, **characterized** in that the bottom roll (10) of the multi-roll calender is composed as a shoe roll.
- 30 6. A calender according to any one of claims 1 to 6, **characterized** in that the properties of the composite shell of the shoe roll are achieved by a fibre orientation such that the

composite shell is more rigid in the circumferential direction than in the axial direction.

7. A calender according to claim 6, characterized in that the composite material is  
5 selected from a group which advantageously includes: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy, and that in order to provide a shell which is more rigid in the circumferential direction in relation to the axial direction of the shoe roll (1, 4, 6, 10), the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres of the  
10 composite material of the shell (11, 41, 61, 101) of the shoe roll (1, 4, 6, 10) has directed at an angle of over 45° with respect to the axis of the shoe roll (1, 4, 6, 10).
8. A calender according to claim 7, characterized in that the angle is advantageously in the range of 70° - 90°.
- 15 9. A calender according to any one of claims 1 to 8, characterized in that the shoe roll (1, 4, 6, 10) is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell (11, 41, 61, 101) of which is supported from a non-rotating central shaft of the roll by means of  
20 hydrostatic loading arrangements (12; 42, 43; 62, 63; 103), such as rows of loading shoes, which transfer the nip force directed at the composite shell rotating around the central shaft so as to be carried by the central shaft.
10. A calender according to any one of the preceding claims 1 to 9, characterized in that,  
25 in calender operation, a shoe roll (4; 6) can be separated from a nip (PN1, KN, PN2) forming contact with a press roll (2; 8) or another shoe roll (4; 6).
11. A calender according to any one of the preceding claims 1 to 10 in a calender in which  
30 there are two stacks (A,B) of three rolls placed one upon the other such that between the stacks there remains a space which is defined by a bottom roll (4) of the upper stack (A) and by a top roll (6) of the lower stack (B), characterized in that the bottom

roll (4) of the upper stack (A) and the top roll (6) of the lower stack (B) can be separated from contact with rolls (2, 8) of their own roll stack (A, B) into nip contact (KN) with each other.

- 5 12. A calender according to any one of the preceding claims 11, characterized in that the shoe roll or rolls are composed of calender rolls between the top and bottom rolls of the upper stack (A) as well as correspondingly between the top and bottom rolls of the lower stack (B), and that at least the bottom roll (4) of the upper roll stack (A) and the top roll (6) of the lower roll stack (B) are fixedly mounted on a calender frame (R)
- 10 such that their shells can be displaced in the direction of the roll stack with respect to supports (13) of the rolls.
13. A calender according to claim 12, characterized in that the shoe roll or rolls are composed of calender rolls between the top and bottom rolls of the upper stack (A) as well as correspondingly between the top and bottom rolls of the lower stack (B), and that at least the bottom roll (4) of the upper roll stack (A) and the top roll (6) of the lower roll stack (B) are provided with loading members located inside the roll shell.
- 15

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>HL/FI991823+</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/FI 00/ 00726</b>	International filing date (day/month/year) <b>25/08/2000</b>	(Earliest) Priority Date (day/month/year) <b>27/08/1999</b>
Applicant <b>VALMET CORPORATION</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,



the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,



the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.



as suggested by the applicant.



because the applicant failed to suggest a figure:



because this figure better characterizes the invention.

2



None of the figures.

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21G 1/00, D21G 1/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	✓ US 5938895 A (KIMMO ILARI HIRVONEN), 17 August 1999 (17.08.99)	1-4,7,11
Y	--	5,6,8-10,12
Y	✓ US 5590593 A (VILLE KORHONEN ET AL), 7 January 1997 (07.01.97)	5,6,12
A	--	1-4,7-11, 13-18
Y	✓ EP 363887 A2 (MITSUBISHI RAYON CO., LTD.), 18 April 1990 (18.04.90)	8-10
A	--	1

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

14 December 2000

Date of mailing of the international search report

18.02.01

Name and mailing address of the International Searching Authority  
 European Patent Office P.B. 5818 Patentlaan 2  
 NL-2280 HV Rijswijk  
 Tel(+31-70)340-2040, Tx 31 651 epo nl,  
 Fax(+31-70)340-3016

Authorized officer

JAN CARLERUD/ELY  
 Telephone No.

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,Y ✓	WO 9963154 A1 (VALMET CORPORATION), 9 December 1999 (09.12.99), page 1, line 14 - line 19 --	8-10
A ✓	EP 890676 A1 (VOITH SULZER FINISHING GMBH), 13 January 1999 (13.01.99) -- -----	1-18

SA 300151

## INTERNATIONAL SEARCH REPORT

Information on patent family members

04/12/00

International application No.

PCT/FI 00/00726

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	5938895	A	17/08/99	NONE	
-----					
US	5590593	A	07/01/97	AT 177803 T	15/04/99
				CA 2139148 A	30/06/95
				DE 69417197 D,T	18/11/99
				EP 0661405 A,B	05/07/95
				FI 95062 B,C	31/08/95
				FI 935912 A	30/06/95
-----					
EP	363887	A2	18/04/90	NONE	
-----					
WO	9963154	A1	09/12/99	AU 4268499 A	20/12/99
				FI 103740 B	00/00/00
				FI 981240 A	31/08/99
-----					
EP	890676	A1	13/01/99	NONE	
-----					